
THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

| REVISION |             |      |          |  |  |
|----------|-------------|------|----------|--|--|
| REV.     | DESCRIPTION | DATE | APPROVED |  |  |
|          |             |      |          |  |  |
|          |             |      |          |  |  |
|          |             |      |          |  |  |
| I        |             |      |          |  |  |
|          |             |      |          |  |  |
|          |             |      |          |  |  |
|          |             |      |          |  |  |
|          |             |      |          |  |  |
|          |             |      |          |  |  |
|          |             |      |          |  |  |
|          |             |      |          |  |  |
|          |             |      |          |  |  |
|          |             |      |          |  |  |
|          |             |      |          |  |  |
|          |             |      |          |  |  |
|          |             |      |          |  |  |
|          |             |      |          |  |  |

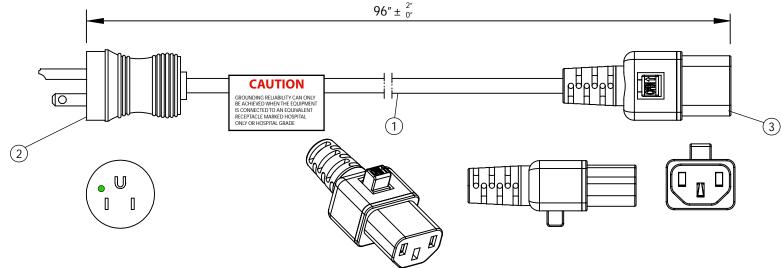

## CONTROLLED

## NOTES:

- 1. CORDAGE: SJTW, 14AWG / 3C, UNSHIELDED, NA COLOR CODE, TEMP. RATING: 105°C, RATING: 125V 15A, JACKET COLOR: BLACK
- 2. PLUG: NEMA 5-15P HOSPITAL GRADE (CLEAR)
- 3. CONNECTOR: LOCKING IEC 60320 C13 (BLACK)
- 4. APPROVALS: UL, cUL
- 5. ROHS COMPLIANT
- 6. LOCKING CONNECTOR RATED UP TO MAXIMUM 35LBS.
- 7. CAUTION LABEL

| Dim<br>range | Tolerance<br>+/-<br>(mm) | Qualtek Electronics Corp.<br>PPC DIVISION |                |                   |  |
|--------------|--------------------------|---|----------------|-------------------|--|
| (mm)         |                          | Part Number:                              | 533013-01      | RoHS<br>Compliant |  |
| 0-1          | 0.15                     |   |                |                   |  |
| 1-6          | 0.20                     | HOSPITAL GRADE LOCKING POWER CORD         |                |                   |  |
| 6-18         | 0.30                     |   | UNIT: in       |                   |  |
| 18-50        | 0.50                     |   |                |                   |  |
| 50-120       | 0.70                     | Drawn / Date                              | Checked / Date | Approved / Date   |  |
| 120-250      | 0.90                     | R. Nuti 04-12-24                          | LY/04-12-24    |                   |  |
| 250-500      | 1.20                     | 04-12-24                                  | 07-12-24       | LT / 04-12-24     |  |