


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	RoHS Compliancy	06-01-06	DP
C	Updated Approvals	03-16-15	LY

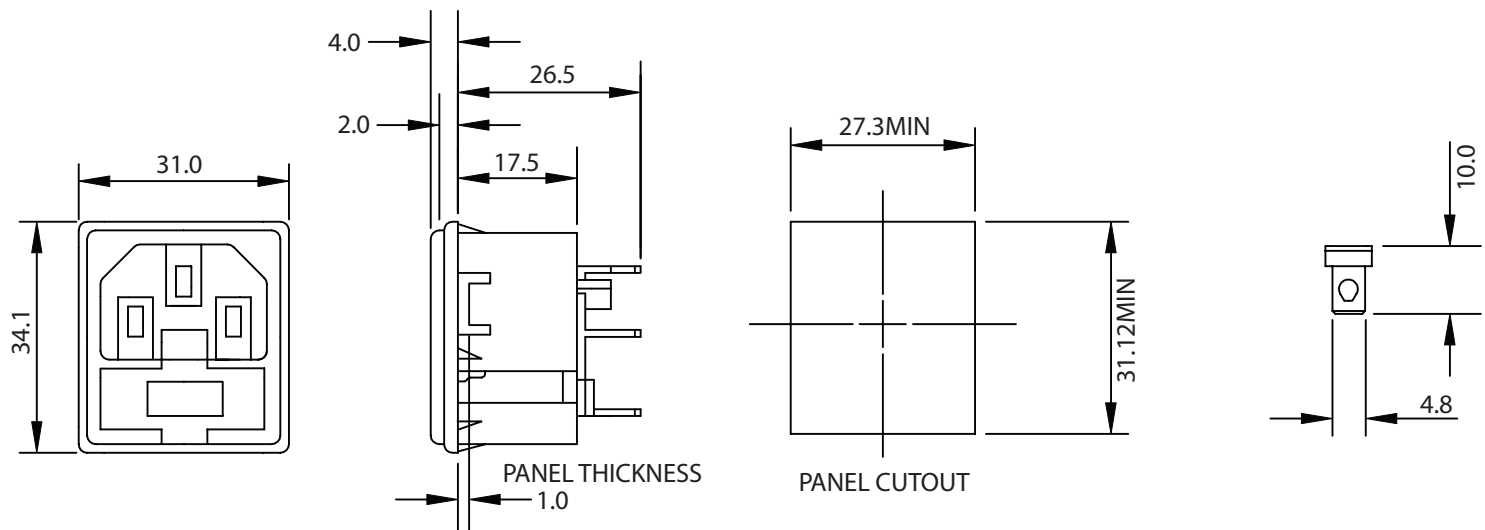

NOTES:

MAX RATING: 10A 250V AC  
CONTACT RESISTANCE: <10 m OHM 9<15 OHM INCLUDING FUSEHOLDER  
INSULATION RESISTANCE: >10<sup>3</sup> M OHM  
A.C.BREAKDOWN: POLE-POLE 5.5kV.  
POLES-PANEL 4.0kV  
OPERATING TEMPERATURE: -40 °C TO 70 °C  
MAX. PIN TEMPERATURE: +65 °C  
MATERIALS: NYLON, FLAMMABILITY RATING UL 94 V-0  
CONTACTS: BRASS, PINS NICKEL PLATED, TAGS TIN PLATED

DUAL FUSE HOLDER, ONE ACTIVE, ONE SPARE  
FUSES NOT INCLUDED - RECOMMENDED SIZE: 5 X 20mm  
PANEL THICKNESS: 1.0mm  
APPROVALS: UL, CSA  
RoHS COMPLIANT

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. PPC DIVISION			
		Part Number:	723-10/48	<div>RoHS Compliant</div>	
0-1	0.15	Description: SNAP-IN INLET WITH FUSEHOLDER			
1-6	0.20				
6-18	0.30		UNIT: mm	REV.C	
18-50	0.50				
50-120	0.70		Drawn / Date	Checked / Date	Approved / Date
120-250	0.90		B.Zhang 08-06-03	08-06-03	JJH / 08-06-03
250-500	1.20				