



THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

MECHANICAL DIMENSIONS:

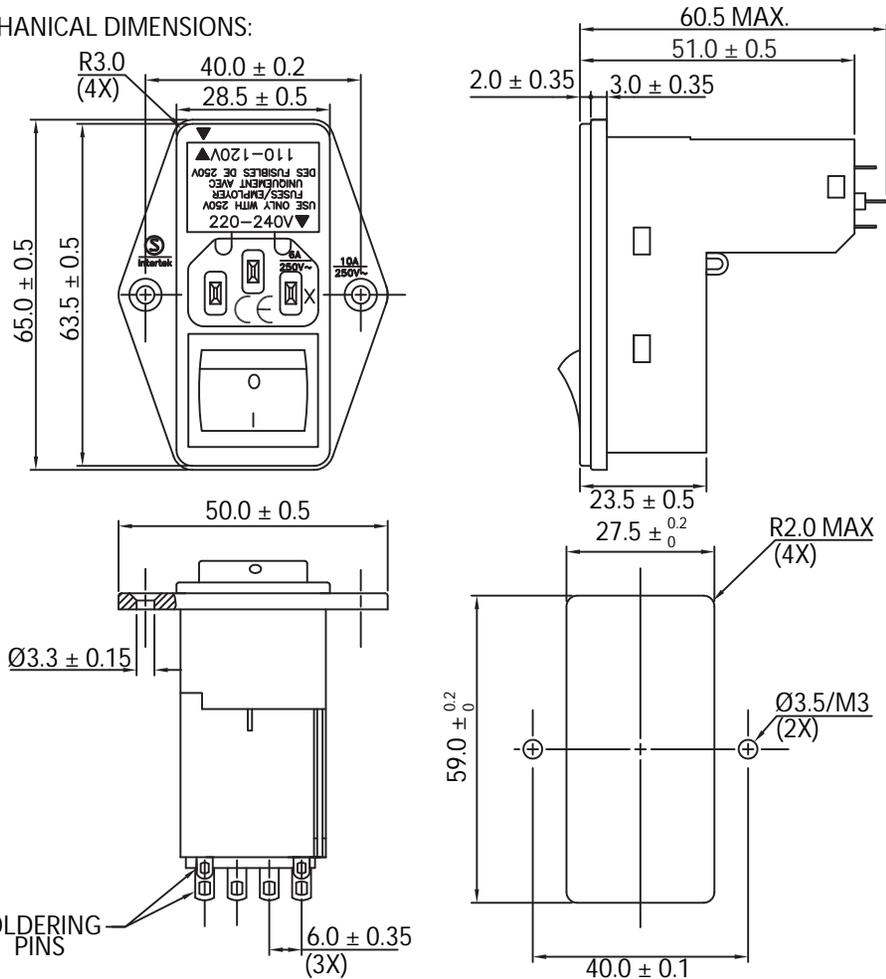


CUTOUT DIMENSION FOR SOCKET MOUNTING

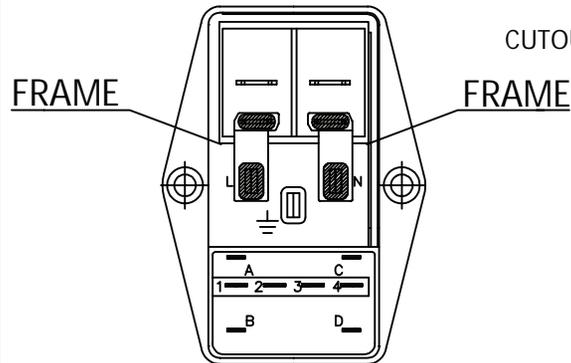

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	Fuse Changed to 5x20mm Size Only	01-08-19	LY

ELECTRICAL SCHEMATIC:

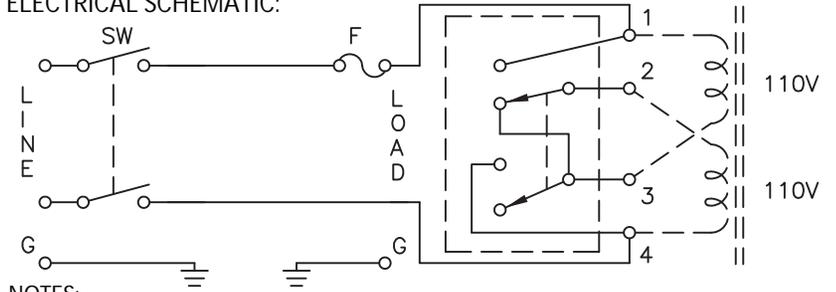

NOTES:

ELECTRICAL CHARACTERISTICS:

RATED VOLTAGE: 250VAC

RATED CURRENT:

UL, CSA @ 115/250VAC 10A RMS MAX

SEMKO @250VAC 6A RMS MAX

HIPOT RATING (FOR ONE MINUTE)

LINE TO GROUND: 2000VAC

LINE TO LINE: 2000VAC

MINIMUM INSERTION RESISTANCE (FOR ONE MINUTE AT 500VDC)

LINE TO GROUND: 10M OHM

LINE TO LINE: 10M OHM

DOUBLE 5x20mm FUSEHOLDER (ONE ACTIVE ONE SPARE - FUSES NOT INCLUDED)

SOLDER TAB TERMINALS

FLAMMABILITY CLASS UL94V-0

PLASTIC CASE

SCREW MOUNT TYPE

= VOLTAGE SELECTOR 110-120 VAC
220-240 VAC

APPROVALS: UL, CSA, SEMKO

RoHS COMPLIANT

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. PPC DIVISION		
		Part Number: 763-00/002	RoHS Compliant	
0-1	0.15	Description: MULTI-FUNCTION MODULE		
1-6	0.20			
6-18	0.30	UNIT: mm	REV. B	
18-50	0.50		Drawn / Date	Checked / Date
50-120	0.70	R.Nuti 09-05-07	09-05-07	JH / 09-05-07
120-250	0.90			
250-500	1.20			